



SPECIFICATION

Surface Acoustic Wave Filter

USER

USER PART No.

SEMCO PART No. **SFX836CYA02**

DOC. No. SMS-51-L-SFT D0-92

DATE Aug 07, 2014

REVISION 000

WISOL					
ISSUED BY	Park. Doo-Cheol 	APPROVED BY (R&D)	Byun, Kyung-Su 	APPROVED BY (QC)	Moon. Gil-Sub 
User					
ISSUED BY		CHECKED BY		APPROVED BY	

WISOL CO., LTD.
531-7, Gajang-ro, Osan-si,
Gyeonggi-do, KOREA, 447-210
<http://www.wisol.co.kr>

A TABLE OF CONTENTS

1. REVISION HISTORY	3
2. DEFINITION	4
3. PRECAUTIONS	4
4. OUTLINE DRAWING & DIMENSIONS	5
5. MARKING	6
6. PERFORMANCE	7
6-1. MAXIMUM RATINGS	7
6-2. ELECTRICAL CHARACTERISTICS	7
7. RELIABILITY	13
7-1. ENGINEERING SAMPLE FLOW CHART	13
7-2. TEST ITEM & CONDITION	14
8. REFLOW CONDITION	15
9. RECOMMENDED PCB DIMENSIONS	15
10. CAUTION	16
11. PACKING	17
11-1. DIMENSIONS	17
11-2. REELING QUANTITY	18
11-3. TAPING STRUCTURE	18
11-4. INNER BOX(Reel Packing) STRUCTURE	19
11-5. OUTER BOX STRUCTURE	20
12. TAPE SPECIFICATIONS	21
13. RoHS DATA	22

1. REVISION HISTORY

000	Aug 07, 2014	All Page	Make specification
-----	--------------	----------	--------------------

2. DEFINITION

2-1. PART No.

S F X 836 C YA 0 2

① ② ③ ④ ⑤ ⑥

No.	EXPLANATION	
①	SAW Filter	
②	Design Type	
③	Center Frequency:	TX 836.5MHz (824~849MHz)
④	Input/Output 50ohm/ 50ohm//8.7nH, mirror Type	
⑤	Package size: 1.8×1.4mm ²	
⑥	Design Revision (02 : Molding Type)	

2-2. APPLICATION : UMTS B5 DPX

3. PRECAUTIONS

3-1. This device should not be used in any type of fluid such as water, oil, organic solvent, etc.

3-2. This is a hermetic device.

MSL(Moisture Sensitive Level) is the '2a' level.

3-3. Ultrasonic cleaning shall be avoided.

3-4. Isopropyl Alcohol and Ethyl Alcohol can be used for cleaning. Contact us before using other cleaning solvents than above

3-5. This is an electrostatic sensitive device.


Please avoid static voltage during operation and storage.

3-6. Sudden change of temperature shall be avoided, deterioration of the characteristics can occur.

3-7. If any malfunction due to designing or manufacturing which is out of specification occurs within one year after the products have been delivered, the maker should exchange the defective products.

4. OUTLINE DRAWING & DIMENSIONS

[Unit: mm]

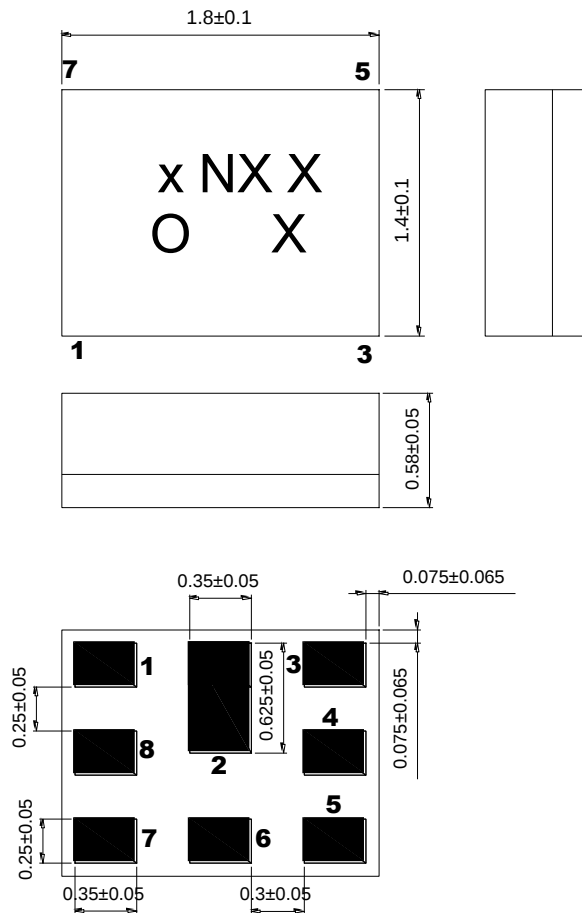

No.	Function
1	Rx Output
3	Tx Input
6	Antenna
2, 4, 5, 7, 8	GND

5. MARKING



5-1. x N X X X

- The 1st, 2nd character 'xN' indicates the model name of SAW Filter “SFX836CYA02” .
- The 3rd character 'X' indicates the year and the month of manufacture.

Year	Month											
	1	2	3	4	5	6	7	8	9	10	11	12
2013	P	Q	R	S	T	U	V	W	X	Y	Z	a
2014	1	2	3	4	5	6	7	8	9	A	B	C
2015	D	E	F	G	H	I	J	K	L	M	N	O
2016	P	Q	R	S	T	U	V	W	X	Y	Z	a

※ This rotates by the 3 years.

- The 4th, 5th character 'X' indicates Lot No.

5-2. O

- This symbol indicates input pin 1.
- This indicates the producing center
 - : China,

5-3. Marking : Laser Marking

6. PERFORMANCE

6-1. MAXIMUM RATINGS

CHARACTERISTICS	RATINGS	UNITS
DC Permissive Voltage	5	V
Maximum Input Power	0.8	W
Operating Temperature Range	− 20 ~ +85	℃
Storage Temperature Range	− 40 ~ +85	℃

6-2. ELECTRICAL CHARACTERISTICS


6-2-1. TABLE

Ta = − 20 ~ +85℃

Item	CONDITION [MHz]	UNIT	RATING		
			Min.	Typ.(25℃)	Max.
TX → ANTENNA					
Insertion Loss	824 ~ 849	dB		1.5	2.1
Inband Ripple	824 ~ 849	dB		0.5	1.2
VSWR	824 ~ 849	-		1.6	2.0
Absolute Attenuation	0 ~ 779	dB	23	28	
	779 ~ 804	dB	28	32	
	869 ~ 894	dB	48	55	
	925 ~ 960	dB	25	31	
	1574 ~ 1577	dB	34	37	
	1638 ~ 1708	dB	35	39	
	1805 ~ 1880	dB	38	42	
	1930 ~ 1990	dB	40	44	
	2110 ~ 2170	dB	36	41	
	2400 ~ 3000	dB	26	31	
3000 ~ 6000	dB	12	16		
Termination Impedance : INPUT / ANTENNA			50Ω(//15[nH]) / 50Ω(// 8.7[nH])		
Item	CONDITION [MHz]	UNIT	RATING		
			Min.	Typ.(25℃)	Max.
ANTENNA → RX					
Insertion Loss	869 ~ 894	dB		1.7	2.1
Inband Ripple	869 ~ 894	dB		0.5	1.2
VSWR	869 ~ 894	-		1.6	2.2


Absolute Attenuation	0 ~ 779	dB	52	57	
	779 ~ 824	dB	55	62	
	824 ~ 849	dB	50	60	
	915 ~ 925	dB	17	22	
	925 ~ 960	dB	38	42	
	960 ~ 2000	dB	44	49	
	2000 ~ 2500	dB	50	55	
	2500 ~ 3000	dB	50	54	
	3000 ~ 6000	dB	30	35	
Termination Impedance : ANT / OUTPUT			50Ω(// 8.7[nH]) / 50Ω		
TX → RX					
Isolation between Rx and Tx	824 ~ 849	dB	53	59	-
	869 ~ 894	dB	50	55	-

6-2-2. TEST FIXTURE

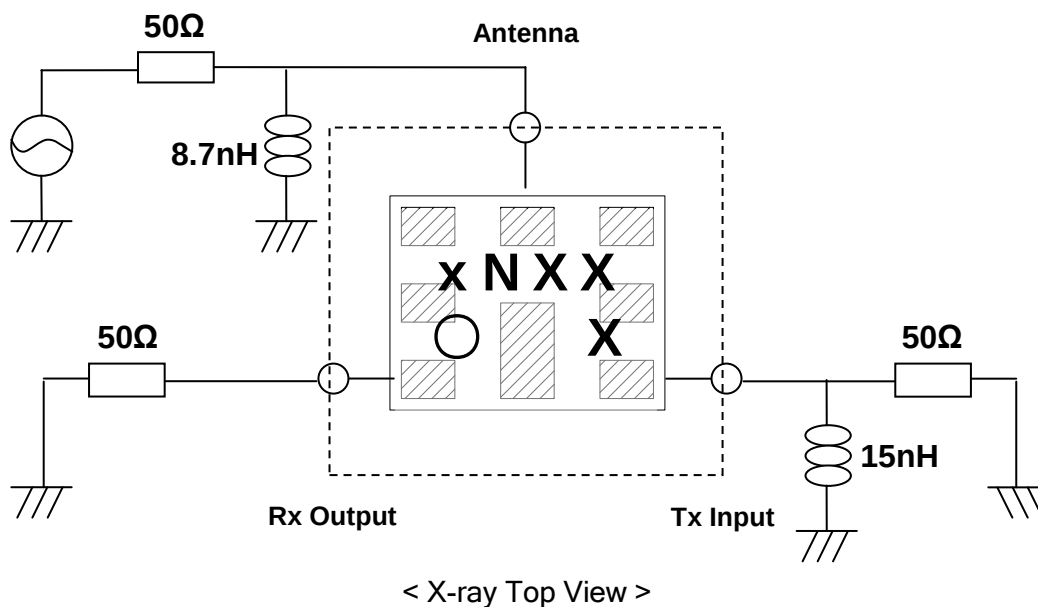


6-2-3. GRAPH


Tx→Ant, Ant→Rx Transmission Characteristics

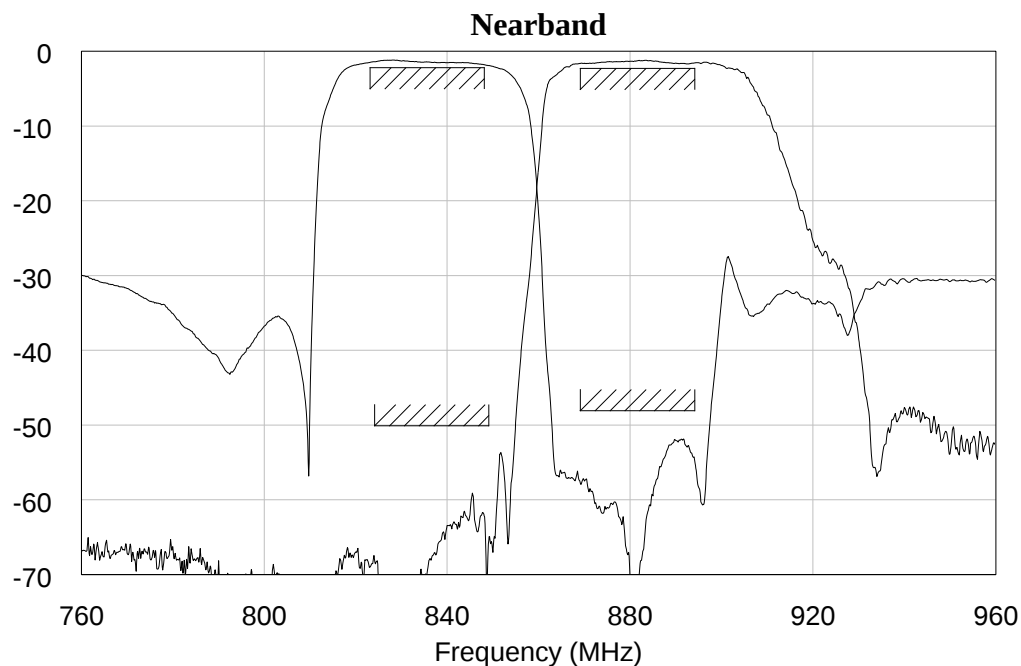


Tx → Rx Isolation Characteristics

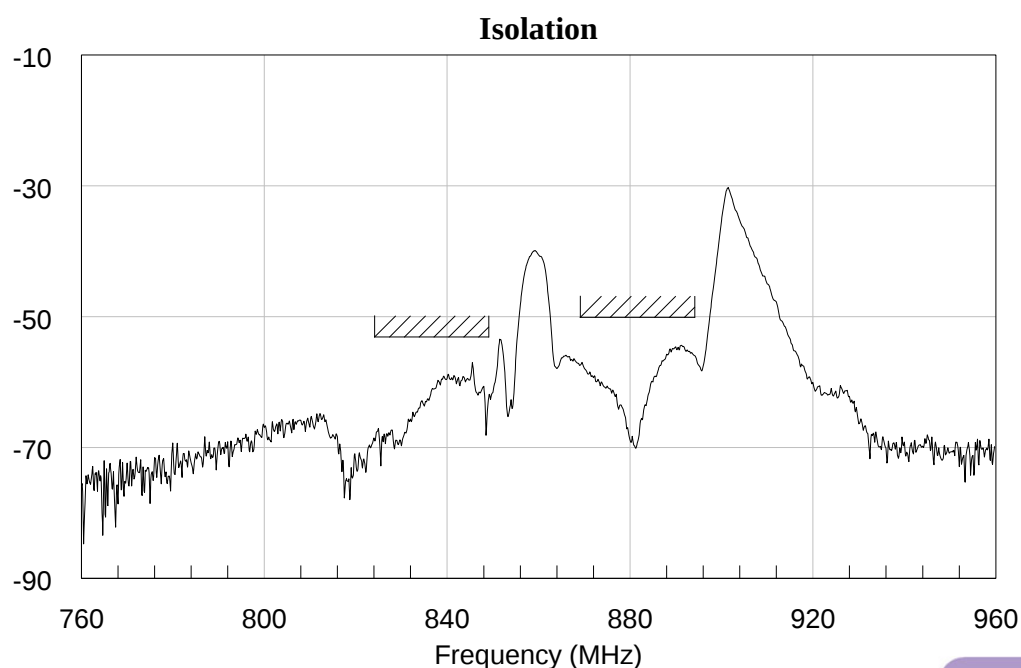


Tx → Ant Wideband Transmission Characteristics

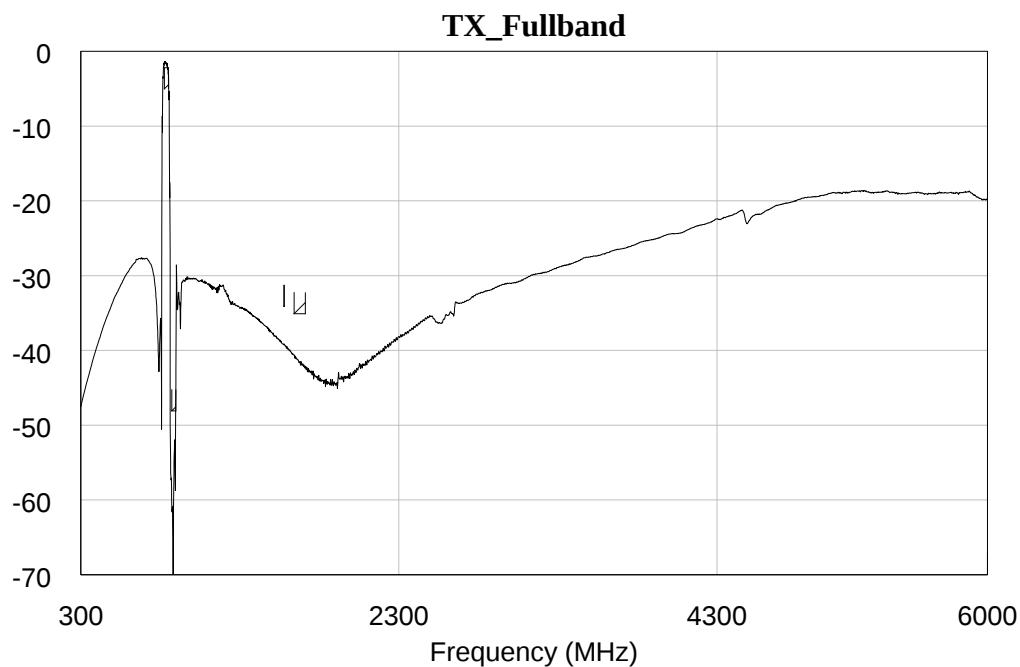

Ant→Rx Full band Transmission Characteristics

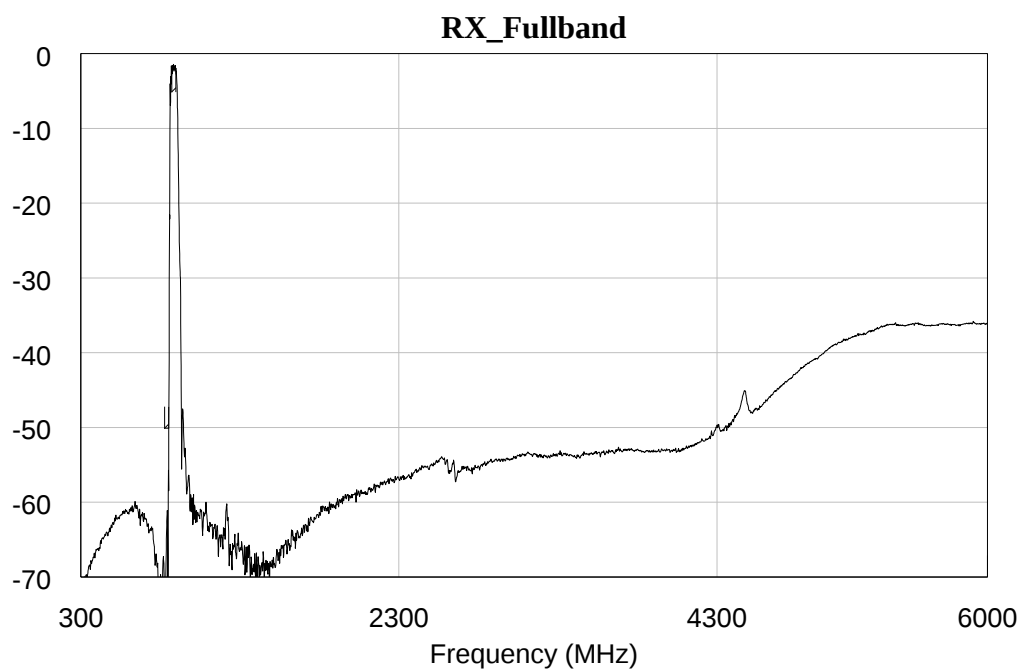


Tx→Rx Full band Isolation Characteristics

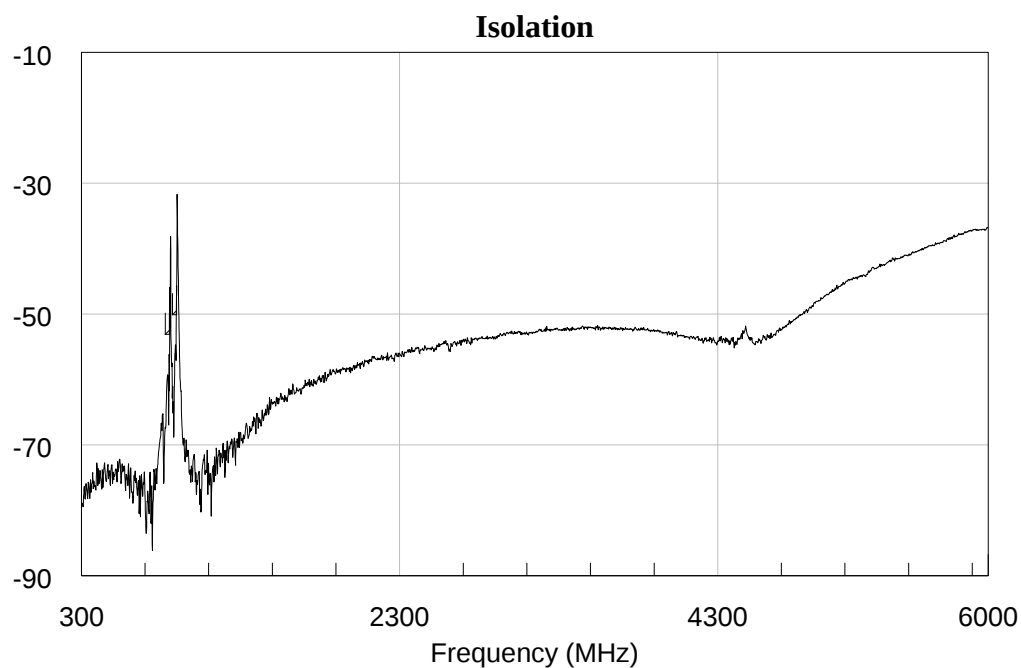

7. RELIABILITY

7-1. ENGINEERING SAMPLE FLOW CHART

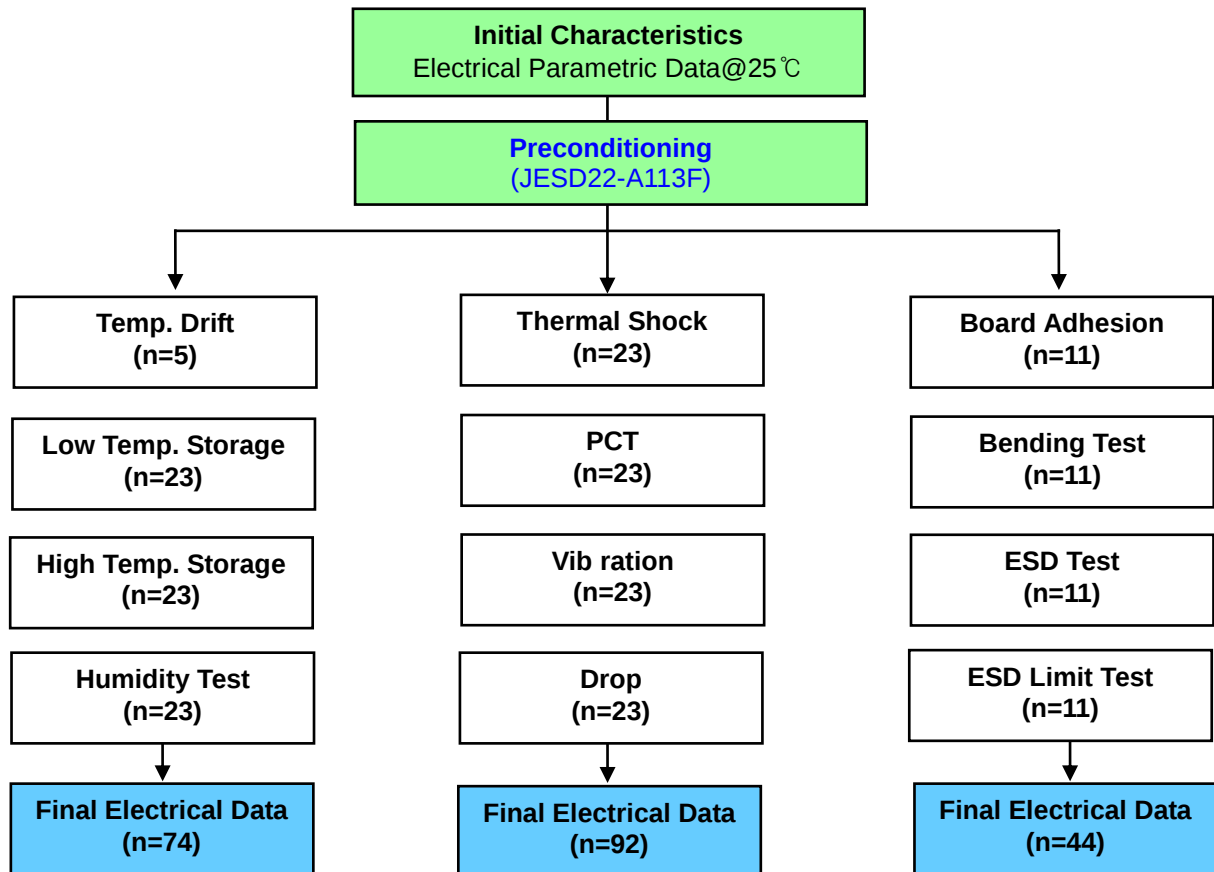


7-2. TEST ITEM & CONDITION

CATEGORY	TEST ITEM	TEST CONDITION	REMARK
	Preconditioning	+125℃ 24hr Baking → +60℃ 60%RH 120hr → Reflow Test(3times)	JESD22A113F




Environment Test	Temp. Drift	-20℃ → +25℃ → +85℃	description
	High Temp. Storage	+85℃ 240hr	JESD22-A103C
	Low Temp. Storage	-40℃ 240hr	JESD22-A119
	High Temp. High Humidity Storage	+85℃ 85%RH 240hr	JESD22-A106B
	Thermal Shock	-40℃/30min ⇔ +85℃/30min , 100cycle	JESD22-A106A
	High Temp. Operating	+121℃ 100%RH 96hr	JESD22-A102C
Mechanical Test	Vibration Test (Random)	20 Hz~2000 Hz,0.053G ² /Hz or 8g's RMS,15min/plane	IEC 68-2-36 Fdb
	Drop Test	152 cm 12times Steel floor JIG(110g~150g)	IEC 1178-1.4.8.9
	Board Adhesion	0.5 mm/sec 1point push	IEC 68-2-21 Ue3
	Bending Test	0.5 mm/sec 3times -PCB : FR4 , PCB SIZE : 100*40 mm	IEC 68-2-21 Ue3
Physical Test	Solder Heat Resistance	±250V,C=100pF,R=1.5 kΩ,1times	IEC 68-2-21 Ue3
	static marginal test	C=100pF,R=1.5 kΩ,1times(demand of customer)	JESD22-A114F

8. REFLOW CONDITION

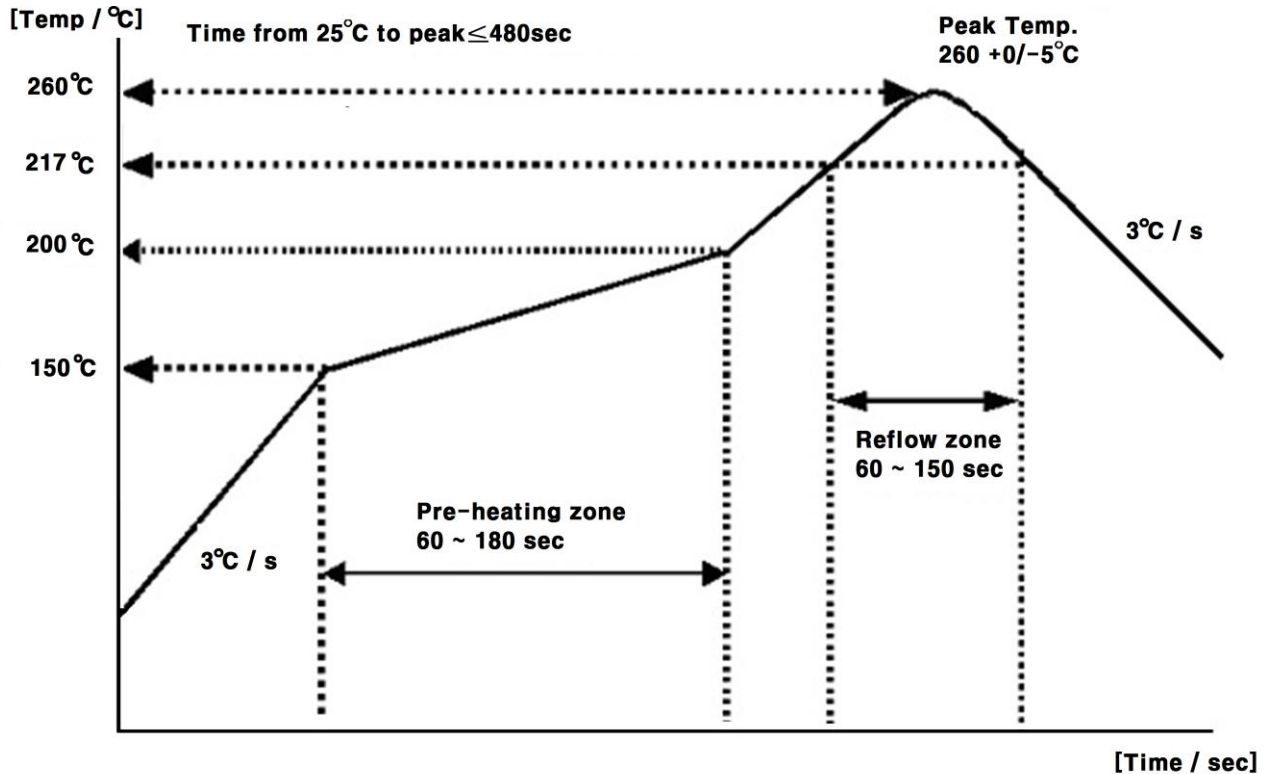

9. RECOMMENDED PCB DIMENSIONS

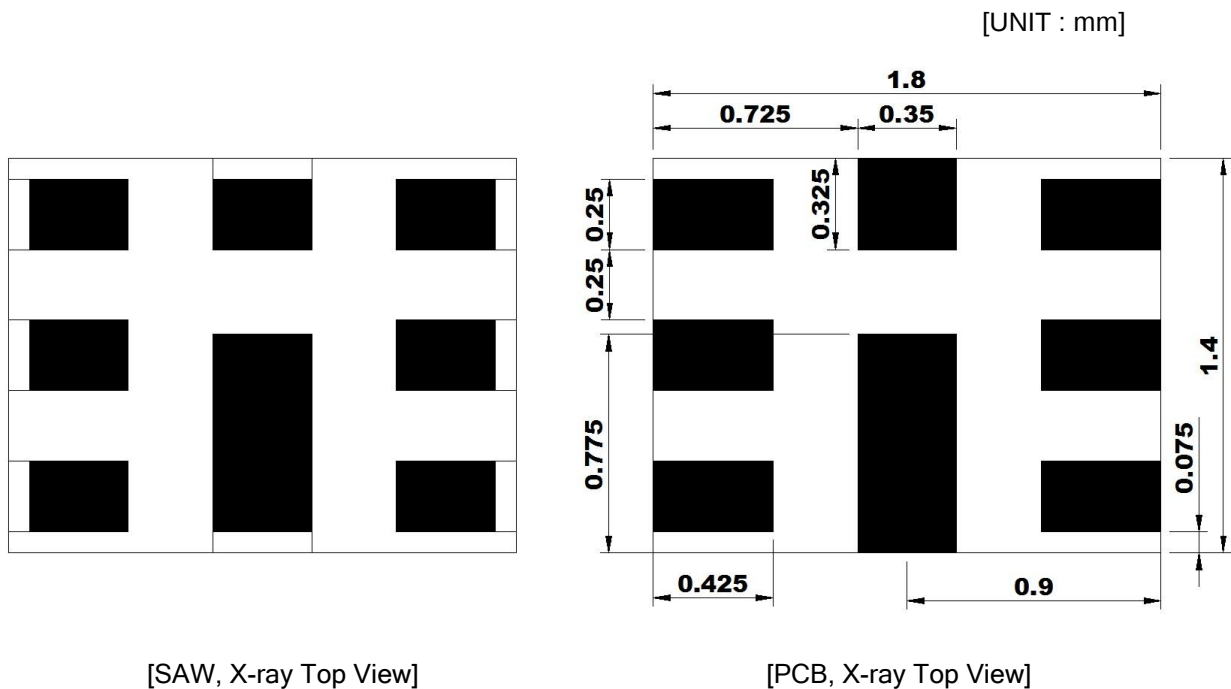

10. CAUTION


Moisture Sensitivity Device Caution (MSL LEVEL=2a)

1. Calculated shelf life in sealed bag : 12 month at <40℃ and <90% relative Humidity(RH)
 2. Peak package body temperature : **260℃**
 3. After bag is opened, devices that will be subjected to reflow solder or other high temperature process must be
 - (a) Mounted within : 672 hours of factory conditions ≤30℃/60% RH, or
 - (b) Stored per J-STD-033
 4. Device require bake, before mounting, if :
 - (a) Humidity Indicator Card reads > 60% when read at 23±5℃
 - (b) 3(a) or 3(b) are not met
 5. If baking is required, refer to IPC/JEDEC J-STD-033 for bake procedure
- Note : Level and body temperature defined by IPC/JEDEC J-STD-020

Aluminum Pack (310mmX370mm)



HIC(Humidity Indication Card)

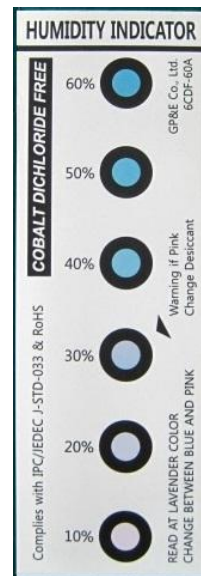


10 to 60% RH

11. PACKING

11-1. DIMENSIONS


- Carrier Tape

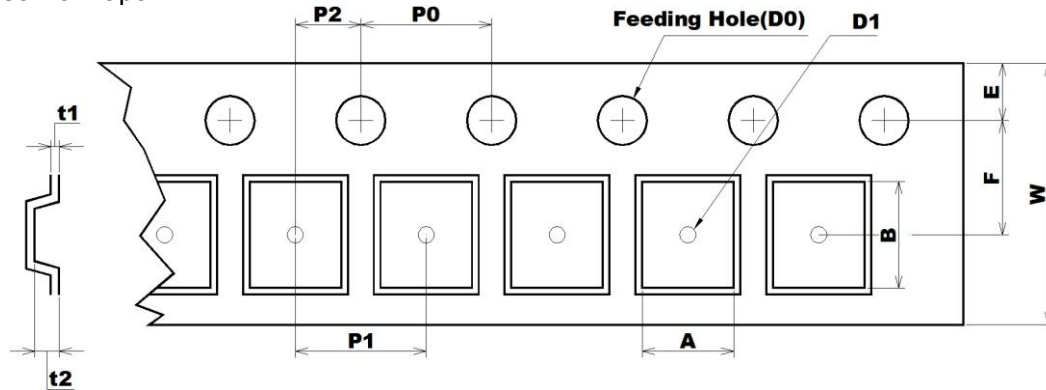

[Unit: mm]

A	B	D0	D1	E	F	P0	P1	P2	t1	t2	W
1.70	2.1	Ø1.55	Ø1.00	1.75	3.5	4	4	2	0.25	0.70	8
+0.10	+0.10	+0.05	MIN	+0.10	+0.05	+0.10	+0.10	+0.05	+0.05	+0.10	+0.30
-0.10	-0.10	-0.05		-0.10	-0.05	-0.10	-0.10	-0.05	-0.05	-0.10	-0.30

- Reel

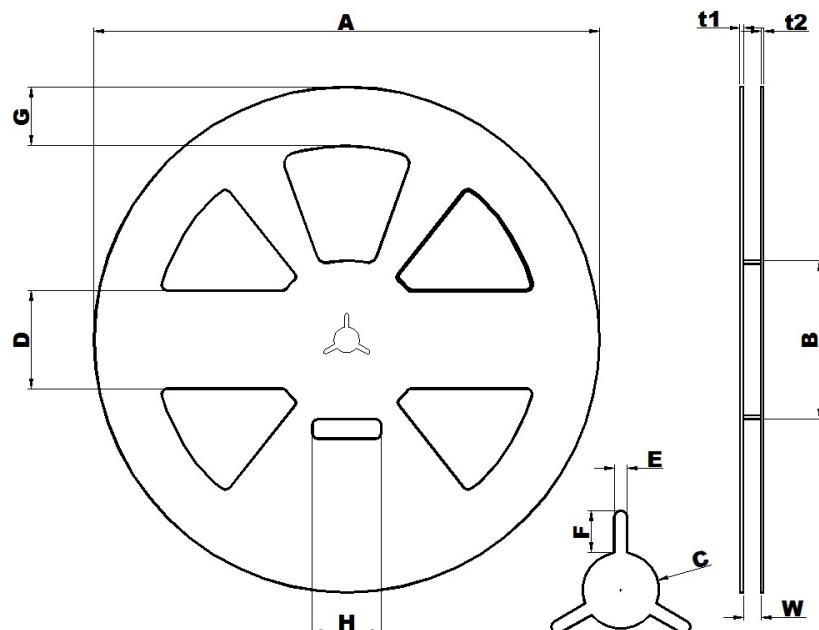

[Unit: mm]

A	B	C	D	E	F	G	H	t1	t2	W
Ø258.0	Ø81.0	Ø13.0	50.0	2.2	7.0	30.0	35.0	1.8	1.5	9.0
+1.0	+1.0	+0.5	+0.8	+0.3	+0.5	+0.8	+1.0	+0.5	+0.5	+1.0
-0.5	-1.0	-0.5	-0.8	-0.3	-0.5	-0.8	-1.0	-0.5	-0.5	-0.5



- The product shall be packed properly not to damaged during transportation and storage.

11-2. REELING QUANTITY


10 inch reel : 8,000 pcs/reel

11-3. TAPING STRUCTURE

11-3-1. The tape shall be wound around the reel in direction shown below.

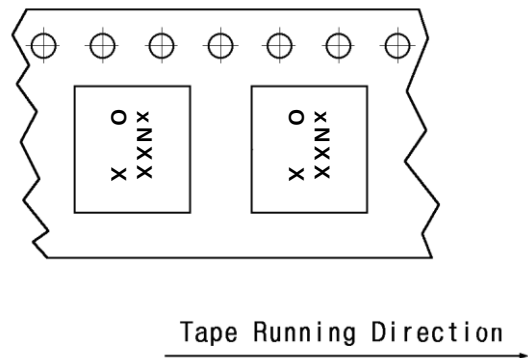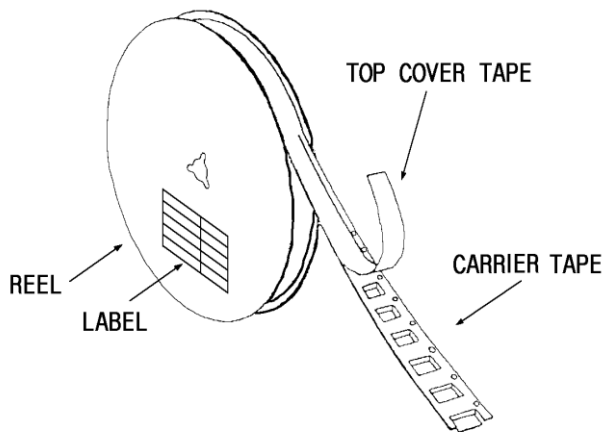

11-3-2. BAR CODE LABEL

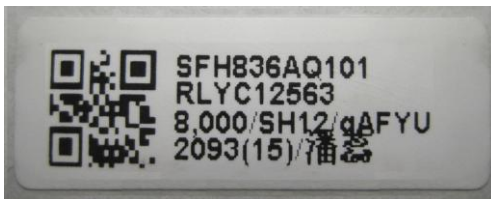

①



MODEL NAME BARCODE

②

SFH836AQ101

Model Name

③

RLYC12563


Reel number

④

8000 / qAFYU


Quantity / Marking

1-3-3. Leader part and vacant position specifications.

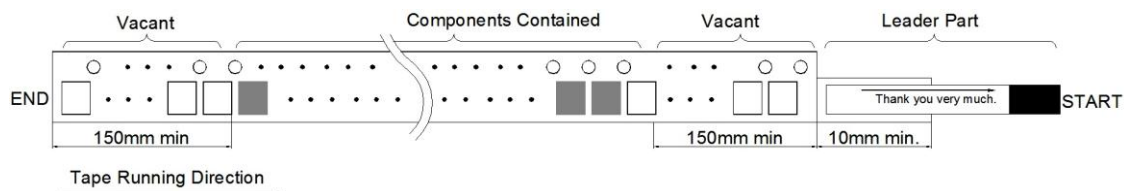


11-4. INNER BOX(Reel Packing) STRUCTURE

Material: Polycarbonate




Material: Polyethylene + Aluminium

Size: 310×370mm²

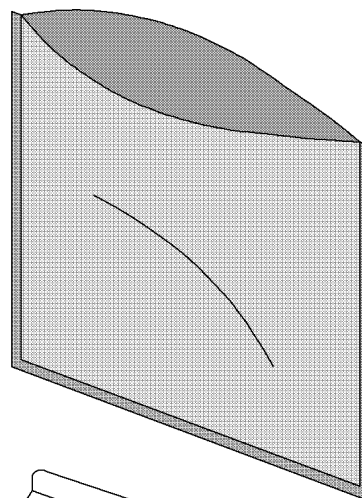

Material: Paper

Size: (D)260×(W)37×(H)265mm³

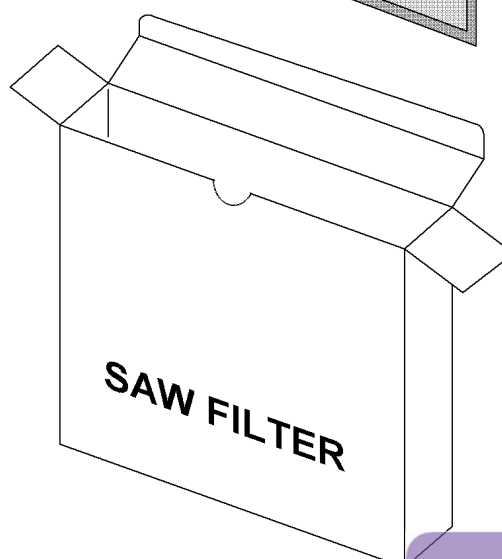


购买原装正品请认准-德方电子
免费服务热线: 400-655-8700
深圳总部电话: 0755-28187877
网址: www.denovocn.com


11-5. OUTER BOX STRUCTURE

Material : Paper

TYPE	SIZE(mm)			Inner Box #
	a	b	c	
A	270	240	275	6 boxes

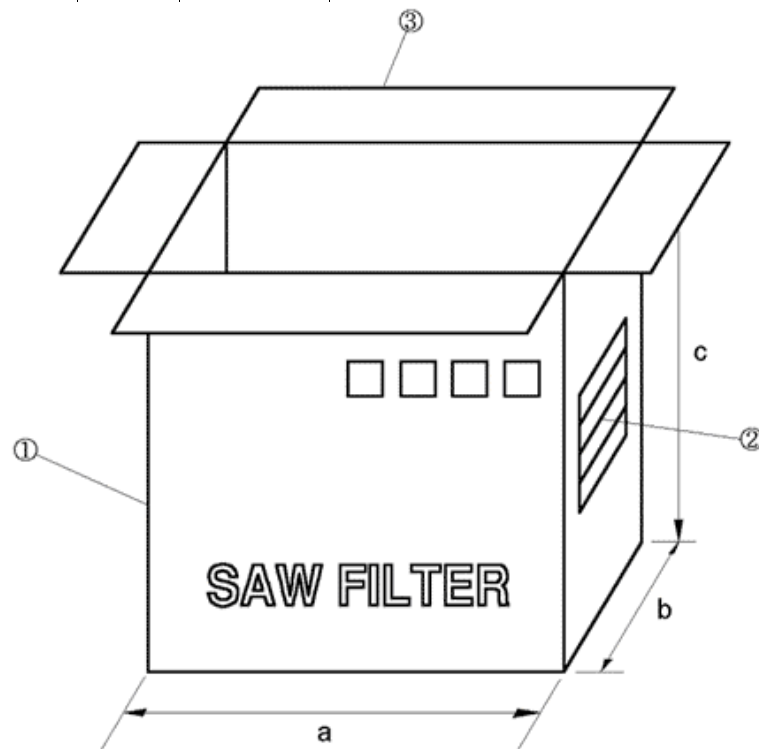

SIDE ①

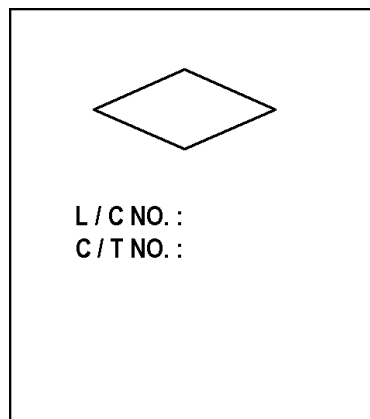

- SIDE is the same as front side.

SIDE ②


MODEL	
Q'TY	EA
USER	
DATE	. .

12. TAPE SPECIFICATIONS

12-1. Tensile Strength of Carrier Tape: 4.4N/mm width

12-2. Top Cover Tape Adhesion (See the below figure)

- pull of angle: 0~15 degree
- speed: 300mm/min.
- force: 20~70g

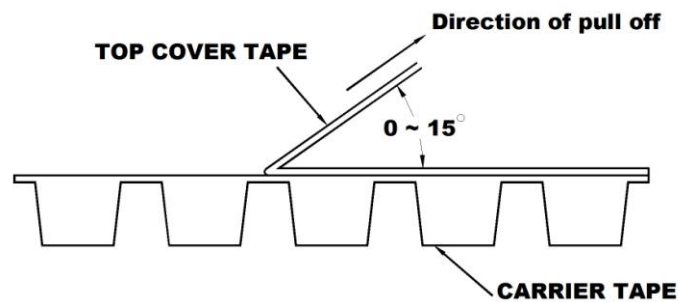

13. RoHS DATA


Test Report No. F690101/LF-CTSAYAA13-31939

Issued Date: 2013. 07. 08 **Page 1 of 6**
To: WISOL CO., LTD.
 373-7
 Gajang-dong
 Osan-si
 Gyeonggi-do
 Korea

The following merchandise was submitted and identified by the client as :

SGS File No.	: AYAA13-31939
Product Name	: SAW FILTER
Item No./Part No.	: N/A
Received Date	: 2013. 07. 03
Test Period	: 2013. 07. 04 to 2013. 07. 08
Buyer(s)	: SAMSUNG
Test Results	: For further details, please refer to following page(s)
Test Performed	: SGS Korea tested the sample(s) selected by applicant with following results.
Test Comments	: By the applicant's specific request, the sampling and testing was performed only for the part indicated in the photo without disassembly.

 Timothy Jeon
 Jinhee Kim
 Cindy Park
 Jerry Jung/ Testing Person

SGS Korea Co., Ltd.



Jeff Jang / Chemical Lab Mgr

Document is issued by the Company subject to its General Conditions of Service printed on back, available on request or accessible at <http://www.sgs.com/conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/conditions>. Member is bound by the limitation of liability, indemnification and jurisdiction clause defined therein. Any holder of the document is advised that information contained herein reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions. If the Company's sole responsibility is to the Client and this document does not constitute parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, circulation or distribution of the content or appearance of this document is prohibited and offenders may be prosecuted to the fullest extent of the law. All references stated the results shown in this test report refer only to the sample(s) tested and each sample(s) are retained for 30 days only.

052 Version5

SGS Korea Co., Ltd.

 322, The O'valley, 555-8, Hoge-dong, Dongan-gu, Anyang-si, Gyeonggi-do, Korea 431-080
 t +82 (0)31 4608 000 f +82 (0)31 4608 050 <http://www.sgs.com> www.kr.sgs.com/greenlab

Member of the SGS Group (Société Générale de Surveillance)

UMTS B5 DPX - Tx 836.5MHz
UMTS B5 DPX - Rx 881.5MHz

1.8×1.4×0.58mm³ 8pin lay-out

Version: 000



Test Report No. F690101/LF-CTSAYAA13-31939

Issued Date: 2013. 07. 08 Page 2 of 6

Sample No - AYAA13-31939.001

Sample Description : SAW FILTER

Item No./Part No. : N/A

Materials : N/A

Heavy Metals

Test Items	Unit	Test Method	MDL	Results
Cadmium (Cd)	mg/kg	With reference to IEC 62321:2008, ICP	0.5	N.D.
Lead (Pb)	mg/kg	With reference to IEC 62321:2008, ICP	5	N.D.
Mercury (Hg)	mg/kg	With reference to IEC 62321:2008, ICP	2	N.D.
Hexavalent Chromium (Cr VI)	mg/kg	With reference to IEC 62321:2008, UV-VIS	1	N.D.
Antimony (Sb)	mg/kg	With reference to EPA 3052(1996), US EPA 6010B(1996), ICP	10	N.D.

Flame Retardants-PBBs/PBDEs

Test Items	Unit	Test Method	MDL	Results
Monobromobiphenyl	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Dibromobiphenyl	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Tribromobiphenyl	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Tetrabromobiphenyl	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Pentabromobiphenyl	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Hexabromobiphenyl	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Heptabromobiphenyl	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Octabromobiphenyl	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Nonabromobiphenyl	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Decabromobiphenyl	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Monobromodiphenyl ether	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Dibromodiphenyl ether	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Tribromodiphenyl ether	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Tetrabromodiphenyl ether	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Pentabromodiphenyl ether	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Hexabromodiphenyl ether	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Heptabromodiphenyl ether	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Octabromodiphenyl ether	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Nonabromodiphenyl ether	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.

NOTE:

- (1) N.D. = Not detected. (<MDL)
(2) mg/kg = ppm
(3) MDL = Method Detection Limit
(4) - = No regulation
(5) Negative = Undetectable / Positive = Detectable
(6) ** = Qualitative analysis (No Unit)
(7) * = Boiling-water-extraction:
Negative = Absence of CrVI coating
Positive = Presence of CrVI coating; the detected concentration in boiling-water-extraction solution is equal or greater than 0.02 mg/kg with 50 cm² sample surface area.

The document is issued by the Company signed in its General Conditions of Service printed below, available on request or accessible at www.fox.com and, for electronic format documents, signed in Terms and Conditions for Electronic Documents at www.fox.com/termsandconditions. Creation is subject to the location of creation and jurisdiction laws defined herein. Any value of the document is subject to the Electronic Commerce Law. Where the Company fulfills at the time of its creation any of the items of Chapter 2 (hereinafter referred to as "the Law"), the Company may, at its discretion, use the document and its contents for any purpose, without the need for the Company's prior approval. The document is not a contract and does not constitute part of a transaction from exercising any rights and obligations under the transaction documents. The document cannot be reproduced more than 100, without prior written approval of the Company. Any unauthorized alteration, forgery or modification of the content or appearance of this document is unlawful and therefore may be prosecuted to the fullest extent of the law. The document is subject to the terms and conditions of the contract, signed by the Company, and the terms and conditions of the contract, signed by the Company, and the terms and conditions of the contract, signed by the Company.

SGS Korea Co., Ltd.

322, The O valley, 555-9, Hoge-dong, Dongan-gu, Anyang-si, Gyeonggi-do, Korea 431-080
 †+82 (0)31 4808 000 †+82 (0)31 4808 050 <http://www.sqs-lab.co.kr> www.kr.sqs.com/greenlab

FQ52 Version 5

Member of the SCS Group (Société Générale de Surveillance)

SGS

Test Report No. F690101/LF-CTSAAYAA13-31939

Issued Date: 2013. 07. 08 Page 3 of 6

Sample No. : AYAA13-31939.001
Sample Description : SAW FILTER
Item No./Part No. : N/A
Materials : N/A

Flame Retardants-PBBs/PBDEs

Test Items	Unit	Test Method	MDL	Results
Decabromodiphenyl ether	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.

Halogen Content

Test Items	Unit	Test Method	MDL	Results
Bromine(Br)	mg/kg	BS EN 14582:2007, IC	30	N.D.
Chlorine(Cl)	mg/kg	BS EN 14582:2007, IC	30	N.D.

Picture of Sample as Received:



NOTE:

- (1) N.D. = Not detected.(<MDL)
- (2) mg/kg = ppm
- (3) MDL = Method Detection Limit
- (4) - = No regulation
- (5) Negative = Undetectable / Positive = Detectable
- (6) ** = Qualitative analysis (No Unit)
- (7) * = Boiling-water-extraction:
Negative = Absence of CrVI coating
Positive = Presence of CrVI coating; the detected concentration in boiling-water-extraction solution is equal or greater than 0.02 mg/kg with 50 cm2 sample surface area.

This document is issued by the Company subject to the General Conditions of Service printed on the back of the report or available at <http://www.sgslab.com/conditions.pdf>, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgslab.com/electronicdocuments.pdf>. Attention is drawn to the limitation of liability, indemnification and jurisdiction clause without limit. Any holder of the document is advised that information contained herein reflects the Company's findings at the time of its issuance only and within the scope of Client's instructions. If any. The Company's sole responsibility is to the Client and this document does not constitute part of a transaction. Notwithstanding all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and each sample(s) are retained for 30 days only.

SGS Korea Co., Ltd.

322, The O valley, 555-8, Hoge-dong, Dongan-gu, Anyang-si, Gyeonggi-do, Korea 431-080
t +82 (0)31 4608 000 f +82 (0)31 4608 059 <http://www.sgslab.co.kr> www.ki.sgs.com/sgslab

P052 Version 5


Member of the SGS Group (Société Générale de Surveillance)



Test Report No. F690101/LF-CTSAYAA13-31939

Issued Date: 2013. 07. 08 Page 4 of 6

Testing Flow Chart for RoHS: Cd/Pb/Hg/Cr⁶⁺ /PBBs&PBDEs Testing

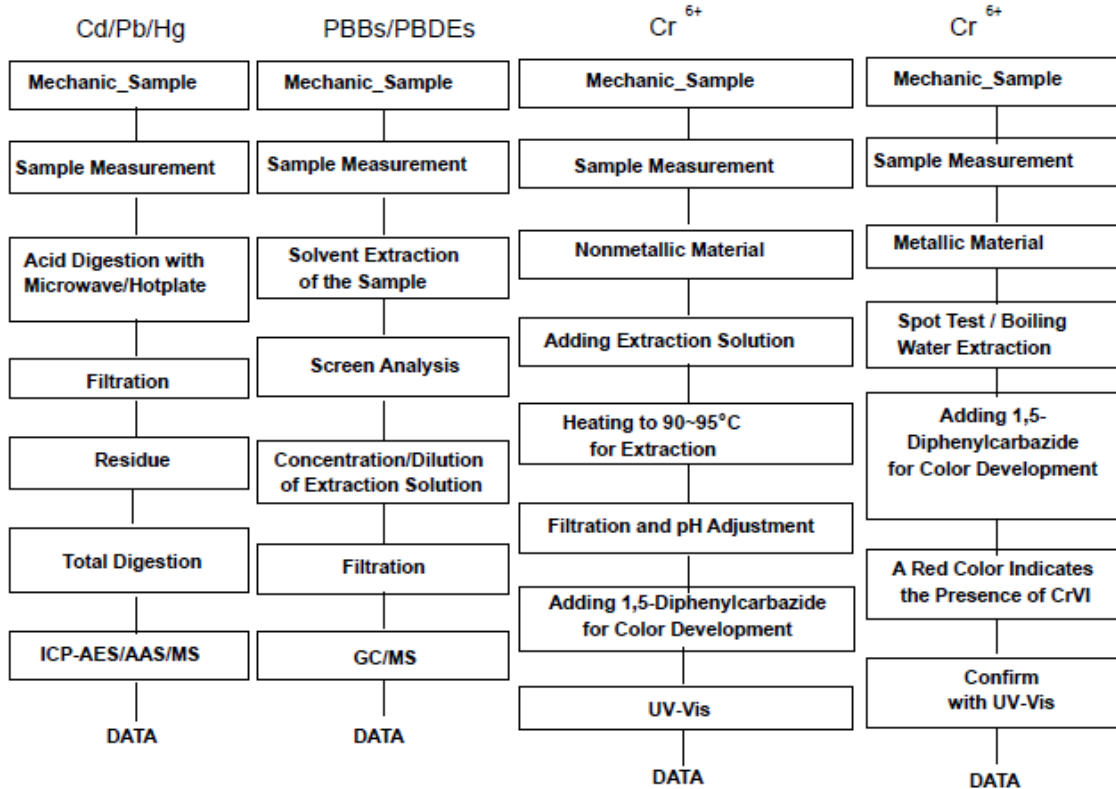

The samples were dissolved totally by pre-conditioning method according to above flow chart for Cd,Pb,Hg.
Section Chief : Gilsae Yi

NOTE:

- (1) N.D. = Not detected.(<MDL)
- (2) mg/kg = ppm
- (3) MDL = Method Detection Limit
- (4) - = No regulation
- (5) Negative = Undetectable / Positive = Detectable
- (6) ** = Qualitative analysis (No Unit)
- (7) * = Boiling-water-extraction:
Negative = Absence of CrVI coating
Positive = Presence of CrVI coating: the detected concentration in boiling-water-extraction solution is equal or greater than 0.02 mg/kg with 50 cm² sample surface area.

The document is issued by the Company subject to the General Conditions of Service (which are not available on request or otherwise at www.sgs.com/ConditionsOfService.htm) for electronic format documents subject to Terms and Conditions for Electronic Documents at www.sgs.com/ElectronicDocuments.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any value of the document is subject to the information contained therein which the Company's findings at the time of its intervention only and under the sole of Client's signature. If any. The Company's sole responsibility is to the Client and this document does not constitute part of a transaction from exceeding all their rights and obligations under the transaction documents. The document cannot be reproduced without the prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. (These statements apply to the results shown in this test report only and not to the sample(s) tested and shall not apply to any other sample(s).)

SGS Korea Co., Ltd.

322, The O valley, 555-8, Hoge-dong, Dongan-gu, Anyang-si, Gyeonggi-do, Korea 431-080
t +82 (0)31 4808 000 f +82 (0)31 4808 050 <http://www.sgs.com> www.kr.sgs.com sgs@sgs.com

F052 Version5


Member of the SGS Group (Société Générale de Surveillance)



Test Report No. F690101/LF-CTSAYAA13-31939

Issued Date: 2013. 07. 08 Page 5 of 8

Flow Chart for Inorganic Elements Testing

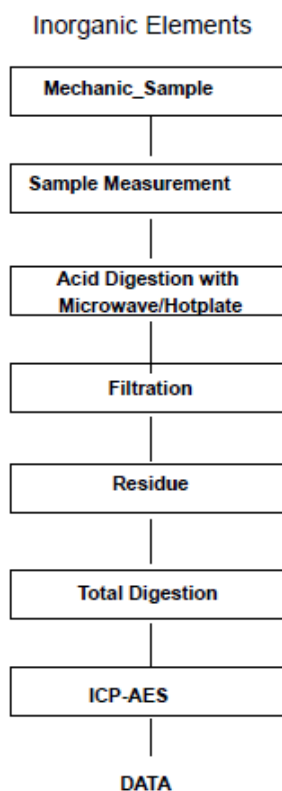

NOTE:

- (1) N.D. = Not detected. (<MDL)
(2) mg/kg = ppm
(3) MDL = Method Detection Limit
(4) - = No regulation
(5) Negative = Undetectable / Positive = Detectable
(6) ** = Qualitative analysis (No Unit)
(7) * = Boiling-water-extraction:
Negative = Absence of CrVI coating
Positive = Presence of CrVI coating; the detected concentration in boiling-water-extraction solution is equal or greater than 0.02 mg/kg with 50 cm² sample surface area.

[illegible]

SGS Korea Co., Ltd.

322, The O valley, 555-9, Hogg-dong, Dongan-gu, Anyang-si, Gyeonggi-do, Korea 431-080
 ☎ +82 (0)31 4808 000 ☎ +82 (0)31 4808 050 <http://www.scslab.co.kr> www.kr.scs.com/cseerlab

Member of the SGS Group (Société Générale de Surveillance)


FD-52 Version 5



Test Report No. F690101/LF-CTSAYAA13-31939

Issued Date: 2013. 07. 08 Page 6 of 6

Flow Chart for Halogen Test

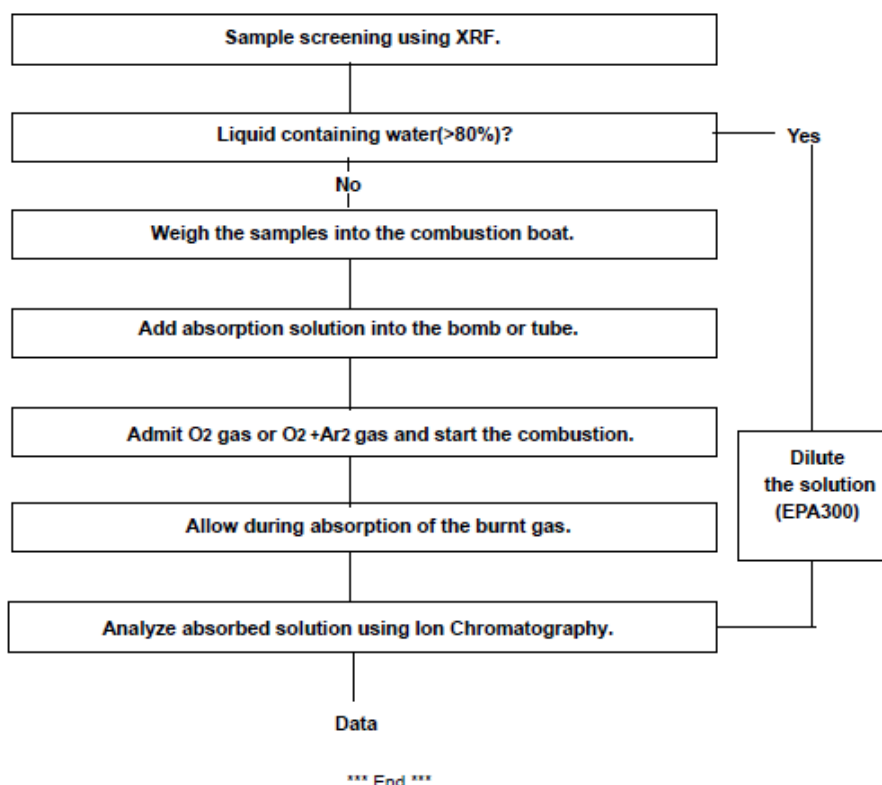

NOTE:

- (1) N.D. = Not detected.($<MDL$)
(2) mg/kg = ppm
(3) MDL = Method Detection Limit
(4) - = No regulation
(5) Negative = Undetectable / Positive = Detectable
(6) ** = Qualitative analysis (No Unit)
(7) * = Boiling-water-extraction:
Negative = Absence of CrVI coating
Positive = Presence of CrVI coating: the detected concentration in boiling-water-extraction solution is equal or greater than 0.02 mg/kg with 50 cm² sample surface area.

[illegible]

F052 Version 5

SGS Korea Co., Ltd.

322, The O valley, 555-9, Hoge-dong, Dongan-gu, Anyang-si, Gyeonggi-do, Korea 431-080
 †+82 (0)31 4808 000 †+82 (0)31 4808 050 <http://www.scs-lab.co.kr> www.kr.scs.com/creeelab

Member of the SGS Group (Société Générale de Surveillance)