

Multilayer Chip Ferrite Bead – HPZ Series

Operating Temp. : -55℃~+125℃



FEATURES

- Internal silver printed layers and magnetic shielded structures to minimize crosstalk
- Perfect effect for EMI suppression at high frequency ($\geq 1\text{GHz}$)
- Low DC resistance suitable for large current signals
- Four types material and wide range of impedance values for various applications


APPLICATIONS

- High frequency noise suppression in electric equipments such as computers and peripheral devices, DVD, cameras, LCD TVs, communication equipments, OA equipments, etc.

PRODUCT IDENTIFICATION

<u>HPZ</u> ①	<u>1608</u> ②	<u>D</u> ③	<u>221</u> ④	<u>-R60</u> ⑤	<u>T</u> ⑥	<u>F</u> ⑦	<u>□□□</u> ⑧																																										
① <table border="1"><tr><td colspan="2">Type</td></tr><tr><td>HPZ</td><td>Chip Ferrite Bead For High Frequency and Large Current</td></tr></table>	Type		HPZ	Chip Ferrite Bead For High Frequency and Large Current	② <table border="1"><tr><td colspan="2">External Dimensions (L×W) (mm)</td></tr><tr><td>1005 [0402]</td><td>1.0×0.5</td></tr><tr><td>1608 [0603]</td><td>1.6×0.8</td></tr></table>	External Dimensions (L×W) (mm)		1005 [0402]	1.0×0.5	1608 [0603]	1.6×0.8	③ <table border="1"><tr><td colspan="2">Material Code</td></tr><tr><td colspan="2">G, D, E, U</td></tr></table>	Material Code		G, D, E, U		④ <table border="1"><tr><td colspan="2">Nominal Impedance</td></tr><tr><td>Example</td><td>Nominal Value</td></tr><tr><td>221</td><td>220Ω</td></tr><tr><td>102</td><td>1000Ω</td></tr></table>	Nominal Impedance		Example	Nominal Value	221	220Ω	102	1000Ω	⑤ <table border="1"><tr><td colspan="2">Rated Current</td></tr><tr><td>R60</td><td>0.6A</td></tr><tr><td>1R0</td><td>1.0A</td></tr></table>	Rated Current		R60	0.6A	1R0	1.0A	⑥ <table border="1"><tr><td colspan="2">Packing</td></tr><tr><td>T</td><td>Tape & Reel</td></tr></table>	Packing		T	Tape & Reel	⑦ <table border="1"><tr><td colspan="2">Hazardous Substance Free Products</td></tr><tr><td colspan="2">F</td></tr></table>	Hazardous Substance Free Products		F		⑧ <table border="1"><tr><td colspan="2">Design Code</td></tr><tr><td>□□□</td><td>Design Code</td></tr><tr><td colspan="2">* Standard product is blank</td></tr></table>	Design Code		□□□	Design Code	* Standard product is blank	
Type																																																	
HPZ	Chip Ferrite Bead For High Frequency and Large Current																																																
External Dimensions (L×W) (mm)																																																	
1005 [0402]	1.0×0.5																																																
1608 [0603]	1.6×0.8																																																
Material Code																																																	
G, D, E, U																																																	
Nominal Impedance																																																	
Example	Nominal Value																																																
221	220Ω																																																
102	1000Ω																																																
Rated Current																																																	
R60	0.6A																																																
1R0	1.0A																																																
Packing																																																	
T	Tape & Reel																																																
Hazardous Substance Free Products																																																	
F																																																	
Design Code																																																	
□□□	Design Code																																																
* Standard product is blank																																																	

SHAPE AND DIMENSIONS

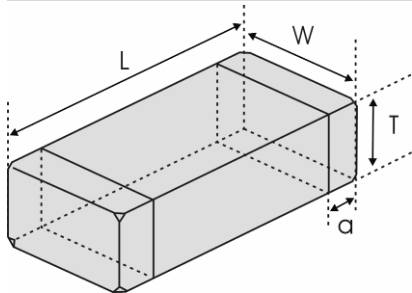

Unit: mm [inch]				
Type	L	W	T	a
HPZ1005 [0402]	1.0±0.15 [.039±.006]	0.5±0.15 [.020±.006]	0.5±0.15 [.020±.006]	0.25±0.1 [.010±.004]
HPZ1608 [0603]	1.6±0.15 [.063±.006]	0.8±0.15 [.031±.006]	0.8±0.15 [.031±.006]	0.3±0.2 [.012±.008]

购买原装正品请认准-德方电子
免费服务热线: 400-655-8700
深圳总部电话: 0755-28187877
网址: www.denovocn.com

Sunlord

Specifications subject to change without notice. Please check our website for latest information. Revised 2013/10/15

Sunlord Industrial Park, Dafuyuan Industrial Zone, Guanlan, Shenzhen, China 518110 Tel: 0086-755-29832660 Fax: 0086-755-82269029 E-Mail: sunlord@sunlordinc.com

SPECIFICATIONS

HPZ1005 TYPE

Part Number	Impedance		Max. DC Resistance	Max. Rated Current	Thickness
	@100MHz	@1GHz Min.			
Units	Ω		Ω	mA	mm [inch]
Symbol	Z		DCR	I _r	T
HPZ1005D121-R60TF	120±25%	100	0.25	600	0.5±0.15 [.020±.006]
HPZ1005D221-R50TF	220±25%	300	0.38	500	
HPZ1005U121-R60TF	120±25%	100	0.25	600	
HPZ1005U121-1R1TF	120±25%	100	0.13	1100	
HPZ1005U221-R50TF	220±25%	200	0.38	500	
HPZ1005U221-R70TF	220±25%	250	0.25	700	

HPZ1608 TYPE

Part Number	Impedance		Max. DC Resistance	Max. Rated Current	Thickness
	@100MHz	@1GHz Min.			
Units	Ω		Ω	mA	mm [inch]
Symbol	Z		DCR	I _r	T
HPZ1608G121-R90TFB01	120±25%	500	0.13	900	0.8±0.15 [.031±.006]
HPZ1608D121-1R5TF	120±25%	200	0.07	1500	
HPZ1608D151-R80TF	150±25%	200	0.2	800	
HPZ1608D151-1R5TF	150±25%	200	0.07	1500	
HPZ1608D221-R60TF	220±25%	300	0.25	600	
HPZ1608D221-1R2TF	220±25%	300	0.12	1200	
HPZ1608D331-R90TFB01	330±25%	380	0.15	900	
HPZ1608D391-R70TF	390±25%	600	0.18	700	
HPZ1608D471-R70TFB02	470±25%	550	0.22	700	
HPZ1608D601-R70TFB01	600±25%	750	0.24	700	
HPZ1608D102-R60TF	1000±25%	1000	0.35	600	
HPZ1608E601-R80TF	600±25%	500	0.25	800	
HPZ1608E102-R60TF	1000±25%	600	0.35	600	
HPZ1608E152-R50TF	1500±25%	1000	0.5	500	
HPZ1608U101-R80TF	100±25%	100	0.2	800	
HPZ1608U101-2R0TF	100±25%	100	0.055	2000	
HPZ1608U121-2R0TF	120±25%	110	0.055	2000	
HPZ1608U221-R60TF	220±25%	220	0.25	600	
HPZ1608U331-R50TF	330±25%	300	0.3	500	
HPZ1608U471-R50TF	470±25%	400	0.32	500	
HPZ1608U601-R50TF	600±25%	450	0.35	500	
HPZ1608U102-R15TF	1000±25%	750	0.9	150	

※: Products with other electrical characteristics can be provided upon customer's request. Please contact your local sales.

购买原装正品请认准-德方电子
免费服务热线: 400-655-8700
深圳总部电话: 0755-28187877
网址: www.denovocn.com


Sunlord

Specifications subject to change without notice. Please check our website for latest information. Revised 2013/10/15

Sunlord Industrial Park, Dafuyuan Industrial Zone, Guanlan, Shenzhen, China 518110 Tel: 0086-755-29832660 Fax: 0086-755-82269029 E-Mail: sunlord@sunlordinc.com


TYPICAL ELECTRICAL CHARACTERISTICS

D, E, U Material Comparison

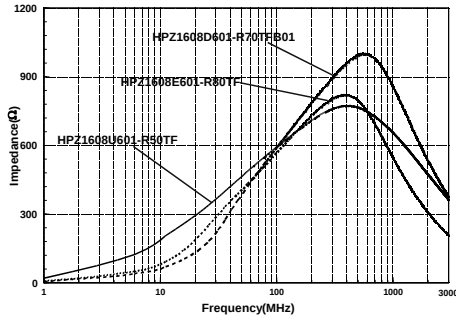







Rated Current

When operating temperatures exceed +85°C, derating of current is necessary for chip ferrite beads for which rated current is 800mA and over. Please apply the derating curve shown in chart according to the operating temperature.






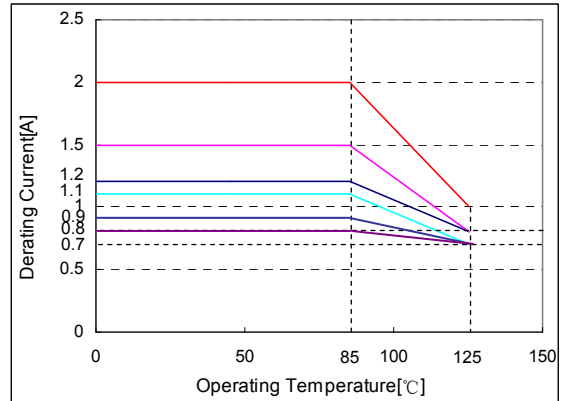


DETAIL ELECTRICAL CHARACTERISTICS

HPZ1005 TYPE

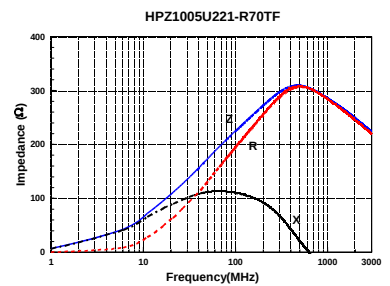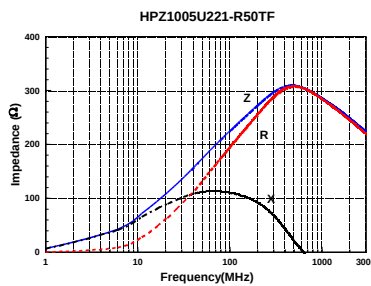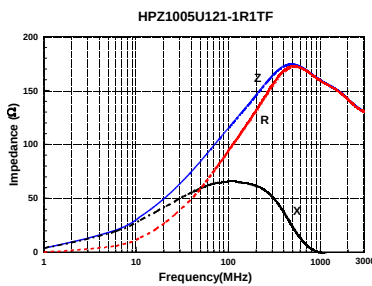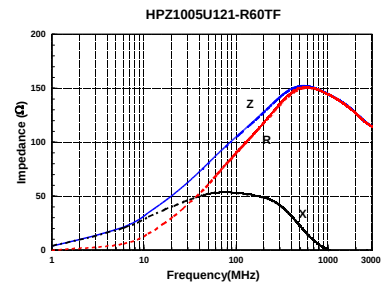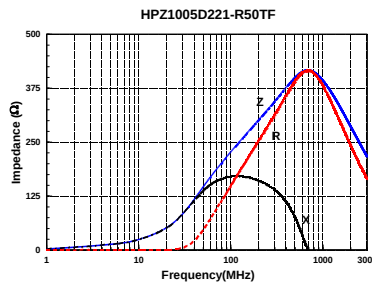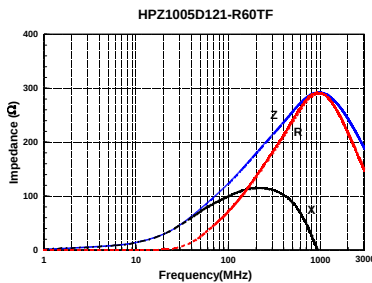

HPZ1608 TYPE

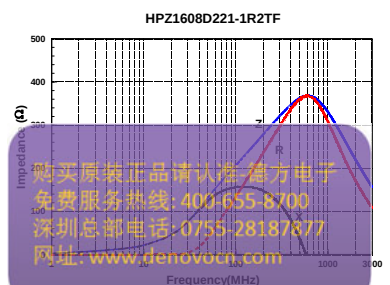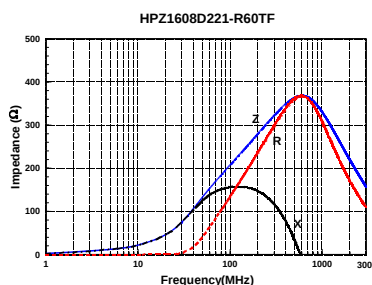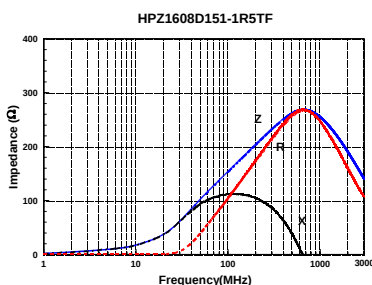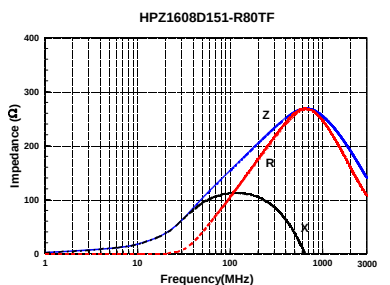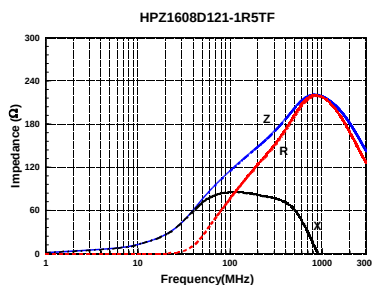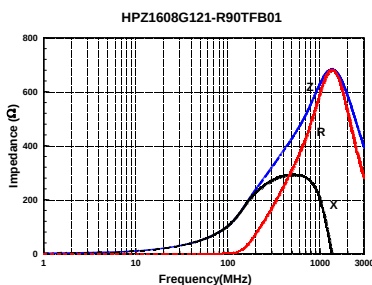

Sunlord

















Specifications subject to change without notice. Please check our website for latest information. Revised 2013/10/15

Sunlord Industrial Park, Dafuyuan Industrial Zone, Guanlan, Shenzhen, China 518110 Tel: 0086-755-29832660 Fax: 0086-755-82269029 E-Mail: sunlord@sunlordinc.com

购买原装正品请认准: 德方电子
免费服务热线: 400-655-8700
深圳总部电话: 0755-28187877
网址: www.denovoch.com

DETAIL ELECTRICAL CHARACTERISTICS

HPZ1608 TYPE

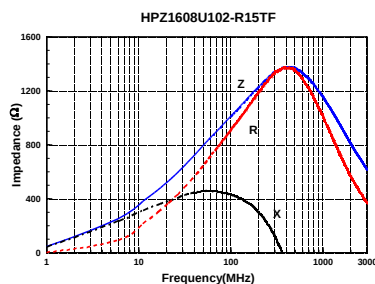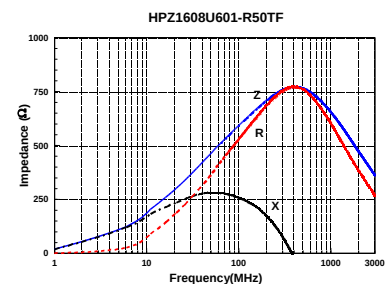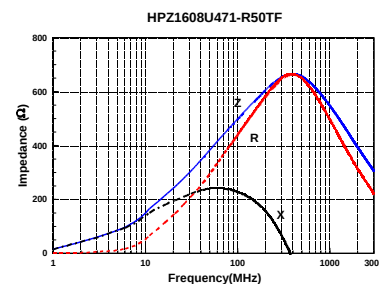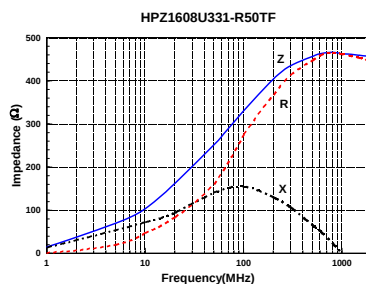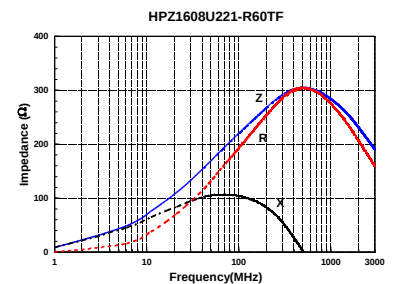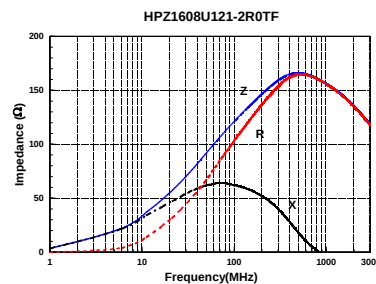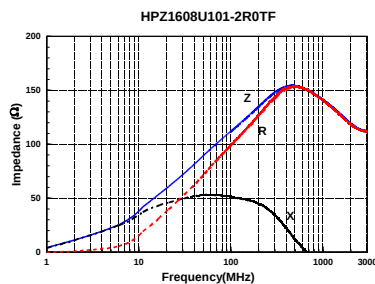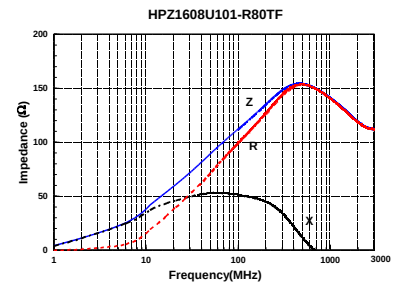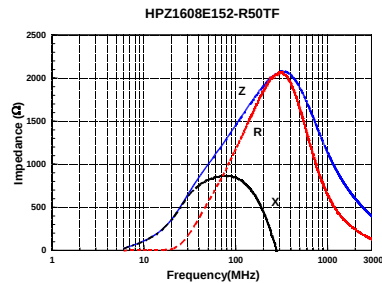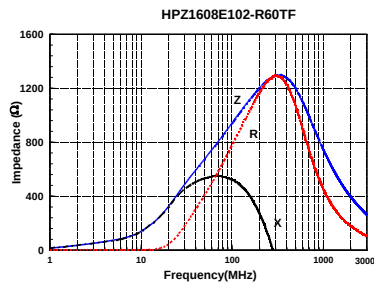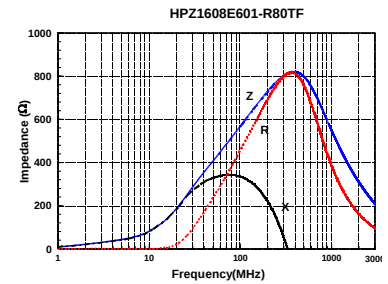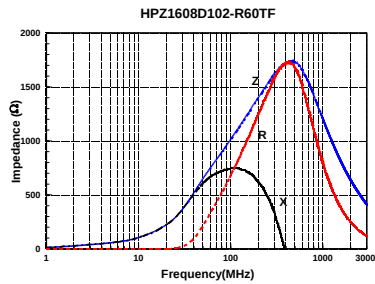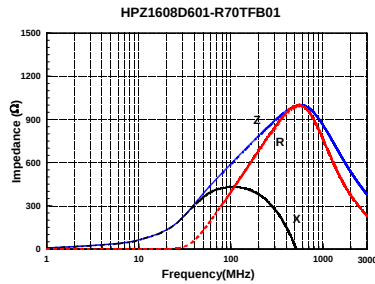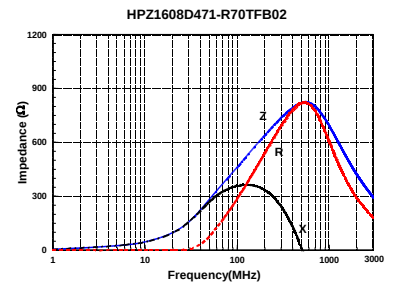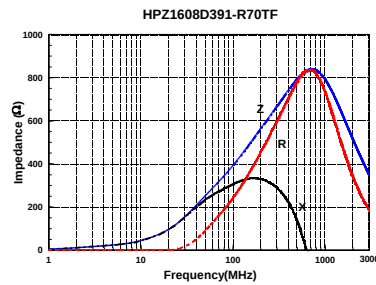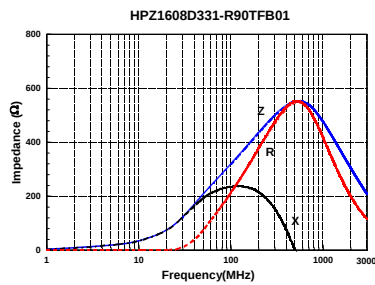

购买原装正品请认准-德方电子
免费服务热线: 400-655-8700
深圳总部电话: 0755-28187877
网址: www.denovocn.com

Sunlord

Specifications subject to change without notice. Please check our website for latest information. Revised 2013/10/15

Sunlord Industrial Park, Dafuyuan Industrial Zone, Guanlan, Shenzhen, China 518110 Tel: 0086-755-29832660 Fax: 0086-755-82269029 E-Mail: sunlord@sunlordinc.com

PACKAGING


Type	Tape Width	Reel Diameter	Quantity (pcs)
1005[0402]	8mm	178mm	10K
1608[0603]	8mm	178mm	4K

RECOMMENDED SOLDERING TECHNOLOGIES

● Re-flowing Profile:

- △ Preheat condition: 150 ~200 °C/60~120sec.
- △ Allowed time above 217 °C: 60~90sec.
- △ Max temp: 260 °C
- △ Max time at max temp: 10sec.
- △ Solder paste: Sn/3.0Ag/0.5Cu
- △ Allowed Reflow time: 2x max


[Note: The reflow profile in the above table is only for qualification and is not meant to specify board assembly profiles. Actual board assembly profiles must be based on the customer's specific board design, solder paste and process, and should not exceed the parameters as the Reflow profile shows.]

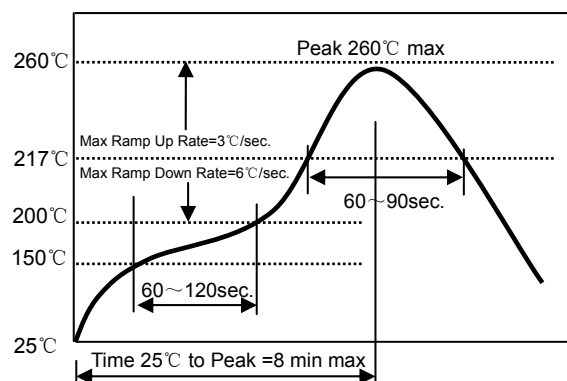

● Iron Soldering Profile.

- △ Iron soldering power: Max.30W
- △ Pre-heating: 150 °C/60 sec.
- △ Soldering Tip temperature: 350°C Max.
- △ Soldering time: 3sec Max.
- △ Solder paste: Sn/3.0Ag/0.5Cu
- △ Max.1 times for iron soldering

[Note: Take care not to apply the tip of the soldering iron to the terminal electrodes.]

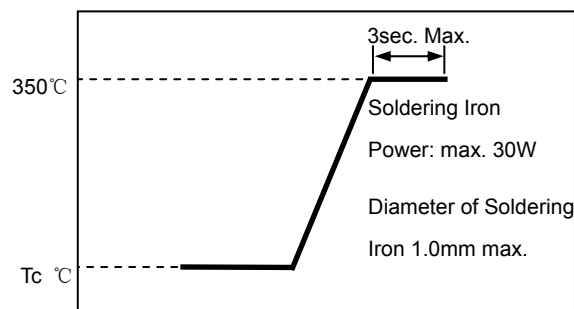

购买原装正品请认准-德方电子
免费服务热线: 400-655-8700
深圳总部电话: 0755-28187877
网址: www.denovocn.com

Sunlord

Specifications subject to change without notice. Please check our website for latest information. Revised 2013/10/15

Sunlord Industrial Park, Dafuyuan Industrial Zone, Guanlan, Shenzhen, China 518110 Tel: 0086-755-29832660 Fax: 0086-755-82269029 E-Mail: sunlord@sunlordinc.com